


A3 PA-133TPC-CE5A

13.3" Industrial Panel PC Intel® Celeron® or Core processor

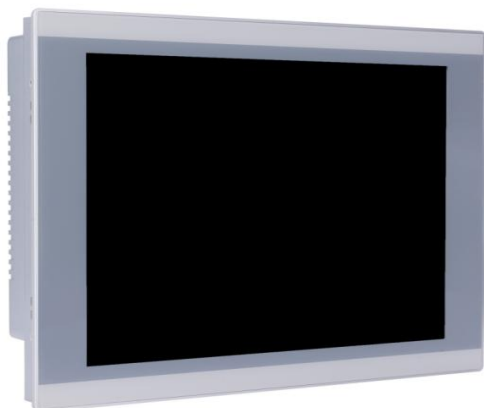

Characteristic

- ◆ 13.3" TFT LED panel
- ◆ Imported resistive touch screen
- ◆ Optional Intel® Celeron® or Core processor
- ◆ Aluminum alloy case, compact fanless design
- ◆ Front panel protection grade IP65
- ◆ Supports full-size Mini PCIe expansion
- ◆ Supports USB 3.0
- ◆ Support Windows Embedded and LINUX
- ◆ Support VESA 75


Overview

This product is a cost-effective LCD industrial panel computer, which can choose Intel® Celeron® or Core processor, and the compact embedded system can provide high-performance computing. High durability design, front panel protection level IP65, high temperature five-wire resistive touch screen, supports multiple interfaces to meet various industrial applications.

Spec

Processor	CPU	Intel® Celeron® J1900
	Frequency	2.00GHz
	L2 cache	2MB
	Memory	1 x SO-DIMM, DDR3L 1333, Maximum support 8 GB
	Storage	1 x 2.5" SATA Bay, 1 x mSATA Bay
	Network (LAN)	1 x 10/100/1000 Mbps Ethernet
	I/O Interface	3 x RS232
	Expand	1 x Full-size Mini PCIe slot
	Watchdog timer	255 levels
physical properties	Size	334.2 x 229.85 x 52.5 mm
	Weight	3.4 Kg
OS	Operating system	Windows 7 32bit&64bit / Windows 8.1 32bit&64bit Windows 10 32bit&64bit/WES7/Linux
Power consumption	Input voltage	12 Vdc
	Power consumption	20W
LCD Display	Display type	13.3" TFT LCD (LED backlight)
	Resolution	1280 x 800
	Angle of view	70(Left), 70(Right), 55(Up), 55(Down)
	Brightness (cd/m2)	300
	Contrast	800
	Backlight life	20,000 hours (Min.)
Touch Screen	Type	Imported resistive touch screen
	Transmittance	80±5% at 550 nm wavelength
	Controller	USB interface
	Durability (number of touches)	≥35 million times
Environment	Operating temperature	0 ~ 50°C with SSD 0 ~ 40°C with HDD
	Storage temperature	-20 ~ 60°C
	Relative humidity	10 ~ 95% @ 40°C (non-condensing)
	EMC	CCC
	Safety	CCC
	Front panel protection	IP65 standard

A3 PA-133TPC-CE5A

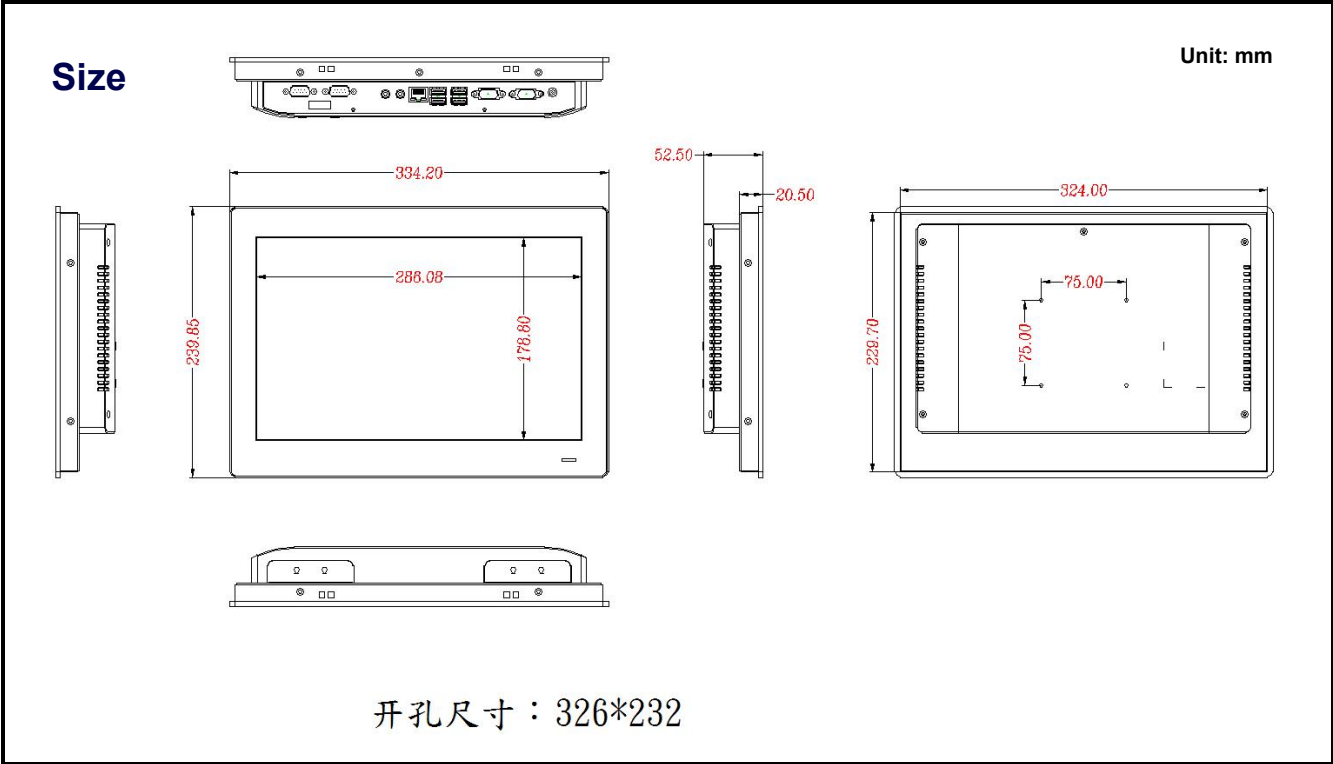


Ordering Information

Part No	Description
PA-133TPC-CE5B (J19)	Intel Celeron J1900
PA-133TPC-CE5B (J64)	Intel Celeron J6412
PA-133TPC-CE5B (I3x)	Intel Core i3 CPU (optional 3/4/6 generation/or higher)
PA-133TPC-CE5B (I5x)	Intel Core i5 CPU (optional 3/4/6 generation/or higher)
PA-133TPC-CE5B (I7x)	Intel Core i7 CPU (optional 3/4/6 generation/or higher)
PA-ARM-1	VESA standard wall mount bracket
PA-ACW-1	WIFI module with antenna
PA-ACW-2	Full Netcom 4G data communication module with antenna

*For other configurations, please contact the business specialist for consultation!

J1900 I/O Interface

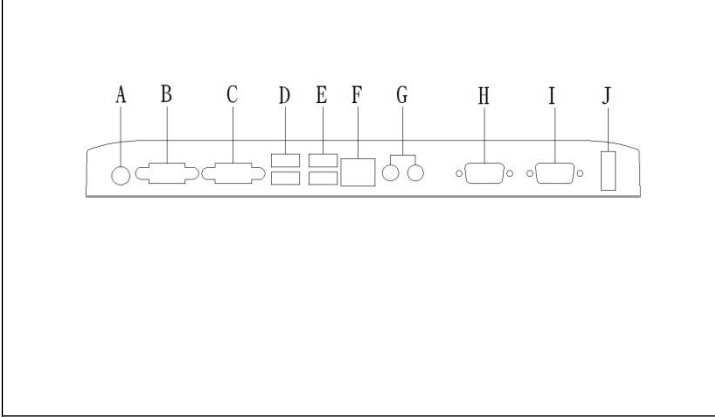

- A. DC-In (12V)
- B. VGA
- C. COM1(RS-232)
- D. 1 x USB 2.0, 1 x USB 3.0
- E. 2 x USB 2.0
- F. RJ45 LAN
- G. AUDIO
- H. COM2(RS-232)
- I. COM3(RS-232)
- J. POWER_SW .

*There may be differences in other configuration I/O interfaces, please contact the business specialist for confirmation!

Information is for reference only, product specifications are subject to change without prior notice.